



FCS-4202 Version: 1

Zoom-Dome-Netzwerkkamera, 2 Megapixel, 802.3af PoE, Tag/Nacht, IR-LEDs, 3fachen Optischen Zoom, WDR, Outdoor

Key-features

- 2-Megapixel (1920 x 1080) HD-Auflösung
 - Komprimierung: H.264/MPEG-4/MJPEG
 - Integrierte IR-LEDs für den Einsatz bei Nacht mit 20 m Reichweite
 - Bietet WDR (Wide Dynamic Range) zur Verbesserung der Sichtverhältnisse bei extreme dunkler oder heller Umgebung
 - Inklusive kostenfreier Video-Überwachungssoftware sowie CMS (Central Management System) mit 64-Kanälen
 - Entfernbare IR-Sperrfilter für Tag- und Nachtbeobachtungen
 - Unterstützt 2 Video-Streams gleichzeitig
 - Unterstützt 3fachen optischen Zoom
 - Unterstützt einzigartige Funktionen zur automatischen Verfolgung beweglicher Objekte
 - Vandalensicheres, IK08-eingestuftes Gehäuse
-

Specifications

System Specifications

Standards & Protocols:

IEEE 802.3 10-BASE-T, Ethernet

IEEE 802.3u 100-BASE-TX, Fast Ethernet

TCP/IP, HTTP, SMTP, FTP, DDNS, UPnP, NTP, PPPoE, DNS, DHCP, RTSP, Samba

Image Sensor:

2-Megapixel 1/2.7" Progressive Scan CMOS

Connectors and Cabling:

1 x RJ-45 10/100 Mbps PoE port

1 x DC Power Jack

1 x Built-in microphone

Modularity:

1 x MicroSD/SDHC card slot

**Taster:**

Reset Button

Indikator:

Power, Link

Lens:

3X optical zoom lens, auto iris, auto focus

f = 3mm ~ 9mm, F1.8

Fov(D), 136° ~ 39°

IR Cut Filter:

Removable infrared-cut filter for day & night function

IR LED:

6 IR LEDs for illumination up to 20m

Shutter Time:

Indoor : 1/30 ~ 1/120 sec

Outdoor : 1/30 ~ 1/1,000,000 sec

Betrachtungswinkel:

62°

P/T/Z:

3X optical zoom , 4X digital zoom

Videokomprimierung:

H.264 / MPEG4 / MJPEG

Resolution:

2M (1920x1080)

Video Format:

MPEG4

Audiokomprimierung:

AMR / AAC / AEC

Power:

Power Consumption: 8W

Power Input: DC12V 1.5A / 802.3af PoE

Features

General:

Backup: MicroSDHC card slot for local storage

IPv6: IPv4/IPv6 network operation DNS: Easy Internet monitoring

Security:

Alarm and Notification: Alarm: Motion Detection; Notification: FTP, SMTP, Samba

Access Control: Multi-level user access with password protection

IP address filtering

HTTPS encrypted data transmission

Video:

Image Setting: - Adjustable image size, quality and bit rate

- Configurable brightness, sharpness, contrast, saturation, white balance and exposure

- AGC/AWB/AES

- Wide Dynamic Range (WDR)

- 3D Noise Reduction (3DNR)

- Flip & Mirror

- Time Stamp

Streaming: Up to 2 video streams

Audio:

Streaming: 2-way audio

Input/Output: line in/out

Performance**Number of Clients:**

16

Datenrate:

10/100Mbps

Storage Capacity:

SD/MicroSD memory card of up to 64GB

Frame Rate:

30 fps at 1920 x 1080; 30 fps at 1280 x 720; 30 fps at 640 x 480; 15 fps at 320 x 240

Minimum illumination:

Color: 1.0 lux at F2.0

Environment**Temperatur (°C):**

Operating: -5°C ~ 50°C

Luftfeuchtigkeit (nicht kondensierend):

Operating: 10% ~ 80%

Physical Specifications**Abmessungen (W x D x H mm):**

63 x 63 x 92 mm

Gewicht:

500 g

Gehäuse:

IP66 Waterproof

Others**Zertifizierung:**

CE, RoHS, FCC, Onvif

Deployment:

Desktop/Ceiling Mount

Operation Systems:

Microsoft Windows 8/7/Vista/XP

Viewing Systems:

Browser: Internet Explorer 6.x or above, Firefox, Chrome, Safari


Cell phone: 3GPP player

Real Player: 10.5 or above

Quick Time 6.5 or above



Diagramm

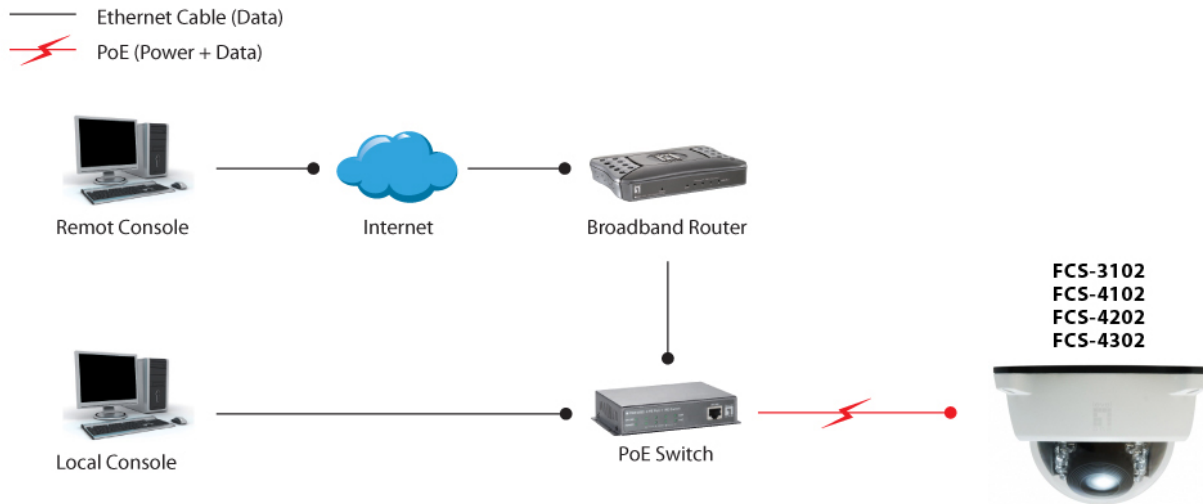

Order Information

FCS-4202

Package Contents

FCS-4202
Netzadapter
RJ-45 Female/Female Coupler
Quick Installation Guide
Ressource CD (Bedienungsanleitung, Hilfsprogramm, 64-Kanal Verwaltungssoftware)
Schraubenset

No liability or responsibility for any errors or omissions in the content.
Specifications are subject to change without notice.
All mentioned brand names are registered trademarks and property of their owners.
Copyright © Digital Data Communications GmbH, Germany. All Rights Reserved.